

# VELLA Stadium Floods

## Precision LED Flood Lighting

Model	Wattage	VEET	IPART	Lumens	Beam Angle	Colour	Warranty
LPVSF480-AS25	480	TBA	TBA	70,800	Asymmetrical 1	5,000k	4 Years
LPVSF480-AS60	480	TBA	TBA	67,500	Asymmetrical 2	5,000k	4 Years
LPVSF800-AS25	800	TBA	TBA	TBC	Asymmetrical 1	5,000k	4 Years
LPVSF800-AS60	800	TBA	TBA	TBC	Asymmetrical 2	5,000k	4 Years
LPVSF960-AS25	960	TBA	TBA	138,500	Asymmetrical 1	5,000k	4 Years
LPVSF960-AS60	960	TBA	TBA	134,000	Asymmetrical 2	5,000k	4 Years
LPVSF1200-AS25	1200	TBA	TBA	TBC	Asymmetrical 1	5,000k	4 Years
LPVSF1200-AS25	1200	TBA	TBA	TBC	Asymmetrical 2	5,000k	4 Years
LPVSF1400-AS25	1400	TBA	TBA	207,200	Asymmetrical 1	5,000k	4 Years
LPVSF1400-AS60	1400	TBA	TBA	191,700	Asymmetrical 2	5,000k	4 Years



### Features & Benefits

- Precision LED flood Lighting
- Inventronics Driver
- Lumiled chip base
- Excellent heat dispensation
- IP65 rated
- 145 lumens per watt
- Extruded aluminum body
- L70 - 54,000 + average life hours
- Robust and sturdy design
- 4 year warranty
- Cable protection pre-installed
- Excellent asymmetrical beam type ensuring low glare and obtrusive light.
- 0 Degree tilt resulting in extremely low sail area
- Available in 4 different sizes
- Laser aiming tool (Option)
- DALI & Dimmable (Option)
- Both 240v and 480v connections available as standard - PLEASE SPECIFY
- Easy driver access for servicing and maintenance
- Under hang mounting acceptable.



### Technical Specifications

Voltage AC277 - 480V	Wattage MIXED	Power Factor 0.95	Beam Angle Asymmetrical	Colour 5,000K	Life Cycle 54,000+
IP Rating IP65	VEET/ESS/REES TBA	CRI >72	Powder Coating AkzoNobel - Anti Corr	Dimmable/DALI Option	Heat Rating -30°C to +50°C

\* Please Note: Light Planet's warranty covers for defective products only. No incidentals like labor or hire cost shall be claimed from any party. Please read our T&C for further information.

# VELLA Stadium Floods

## Precision LED Flood Lighting


### Dimensions / Weight & Mounting Options

Model	Length	Height	Depth	Weight
LPVSF480	581mm	535mm	110mm	16.6 kg's
LPVSF800/960	656mm	765mm	138mm	32.0 kg's
LPVSF1200/1400	673mm	976mm	138mm	43.8 kg's

Model	Sail Area	Under Hang	Removable Driver
LPVSF480 - ALL	0.0440	YES	YES (order parts)
LPVSF800/960	0.0758	YES	YES (order parts)
LPVSF1200/1400	0.1100	YES	YES (order parts)



0° Tilt resulting in a very low Sail Area

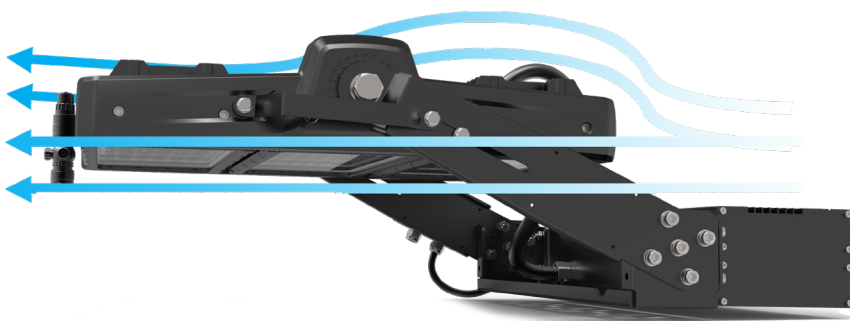


Typical Top & Under Hang Installation



10k Surge Protection



Cable protection Included

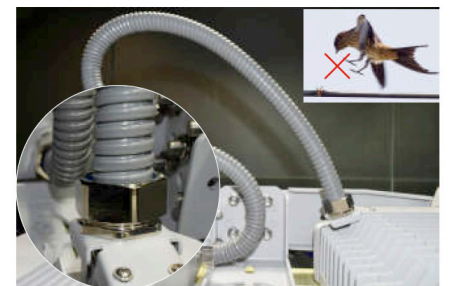

\* Please Note: Light Planet's warranty covers for defective products only. No incidentals like labor or hire cost shall be claimed from any party. Please read our T&C for further information.