

3w Emergency Exit

Standard & Blade - D24m

Model	Wattage	Classification	Mounting	Test Mode	Warranty
LPEMGEX	3w	D24m - Class 2	Ceiling / Wall	Manual	3 years
LPEMGEX-B	3w	D24m - Class 2	Ceiling	Manual	3 years
LPEMGEX-BRK	-	Recessed Kit	Recessed	-	3 years



Features & Benefits

- 24m - Class 2
 - Easy to install
 - AS/NZS 2293.3 compliant
 - Long Life LiFePO4 Battery
 - High quality LED driver
 - 240 Lumen's
 - 2 hour battery back up
 - 3 year warranty period
 - Pictogram replaceable.
 - Includes three pictograms
- IP20 Rated
 - Integrated self test button
 - Maintained fitting
 - Replaceable battery
- 



3 x Pictograms Included

Dimensions & Weight

Model	Length	Width	Depth	Net Weight
LPEMGEX	357mm	210mm	210mm	1.50kg
LPEMGEX-B	357mm	210mm	210mm	1.50kg
LPEMGEX-BRK	357mm	210mm	60mm	1.50kg

Technical Specifications




Voltage 220-240VAC	Wattage - Total Load 3w(+/-5%)	Power Factor >0.3	Test Mode Manual	Classification 24m - Class 2	Life Cycle 45,000 Hrs
IP Rating IP20	CCT 5,000k	CRI >80	Battery Duration 2 Hours	Charge Time 15 Hours	Heat Rating 0°c to +45°c

3w Emergency Exit


Standard & Blade - 24m




LPEMGEX

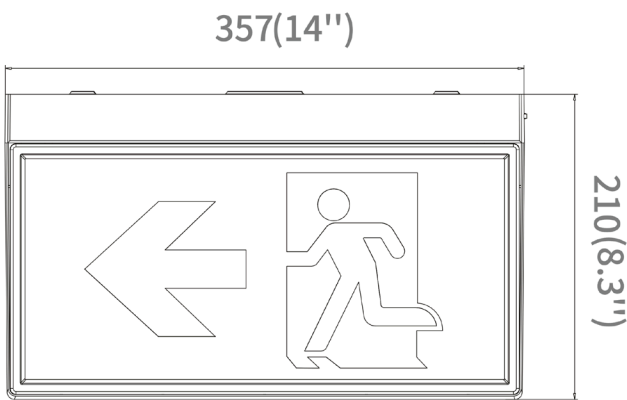


60 (2.4")




LPEMGEX-B

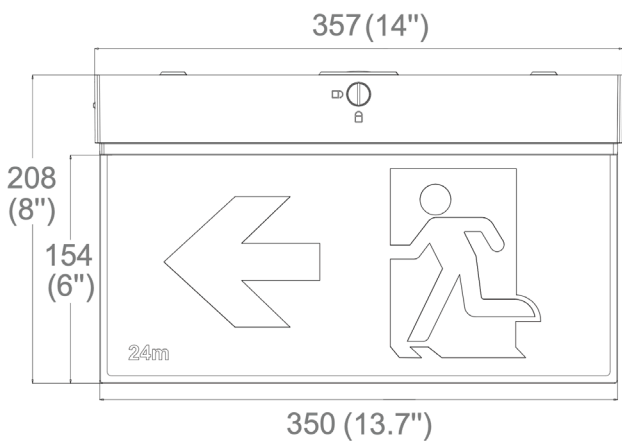

61 (2.4")



LPEMGEX-BRK

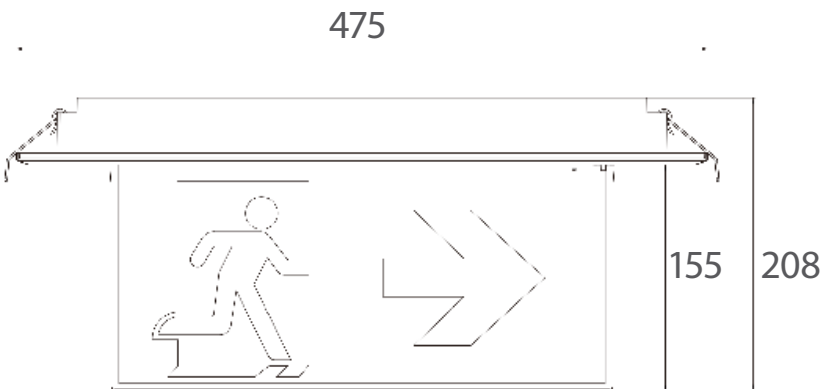

101

