



HALO Wall Lights

Full and Half Eyelid Profiles

| Model | Wattage | Profile | IP Rating | Lumens | CCT | Warranty |
|----------|---------|-------------|-----------|-------------|--------------|----------|
| LPHWL12w | 12w | Half Eyelid | IP65 | 880 - 1100 | 3k / 4k / 5k | 3 Years |
| LPHWL18w | 18w | Full Eyelid | IP65 | 1450 - 1800 | 3k / 4k / 5k | 3 Years |

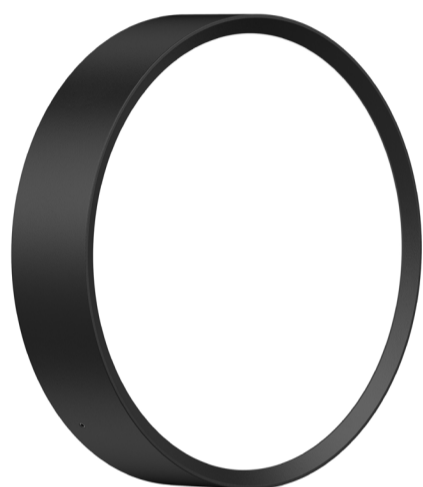

Full Eyelid

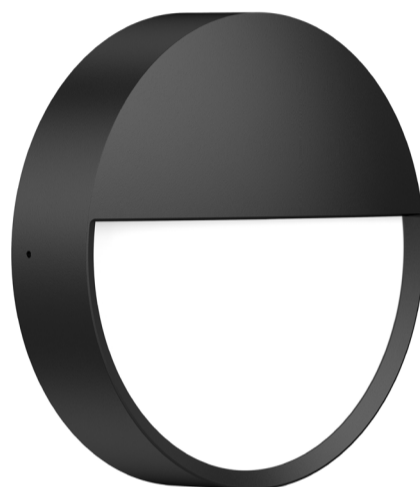

Half Eyelid

Features & Benefits

- Power coated aluminum body
- Architectural design
- Vandal resistant
- 94-V0 Fire rated PC cover
- Easy to install
- CCT change - 3,4,5k
- 240 Lumens
- SAA Approved
- Ik10 Rated
- IP65 Rated
- Recessed & Surface options
- 2 x profile options - Full Eyelid and Half Eyelid



Dimensions & Weight

| Model | Diameter | Depth | Dimmable | Net Weight |
|----------|----------|-------|----------|------------|
| LPHWL12w | 250mm | 74mm | NO | 1.30kg |
| LPHWL18w | 250mm | 58mm | NO | 1.35kg |

Technical Specifications

| | | | | | |
|-----------------------|----------------------|----------------------|--------------------|-------------------------|-------------------------------|
| Voltage 200-240VAC | Wattage 12w / 18w | Power Factor >0.9 | Beam Angle 110° | IK Rating IK10 Rated | Life Cycle 50,000 Hrs |
| IP Rating IP65 | CCT 3k, 4k, 5k | CRI >80 | Diffused Yes | Dimmable No - Option | Heat Rating -20°C to +45°C |