

Adjustable Batten Light


Tri-Colour / Tri-Wattage

Model	Wattage	VEET	IPART	Lumens	Colour	Warranty
LPABL6	10 / 15 / 20	NO	NO	1,400 / 2,100 / 2,800	3k / 4k / 55k	5 Years
LPABL	15 / 20 / 24	YES	YES	2,100 / 2,800 / 3,360	3k / 4k / 55k	5 Years



Features & Benefits

- PC diffuser for anti-glare
- Tri-wattage & Tri-colour switchable
- Simple installation
- Backed by a 5 year warranty period
- Side or rear power entry for easy installation
- SAA Approved
- IK08 Rated
- 120 Degree Beam
- Dimmable driver 1-10v
- Motion sensor accessory available - 2 min installation
- 140 Lumens per watt
- Extra large terminal block for easy wiring
- Suspension mounting kits available
- Flicker Free
- VEET / IPART - Approved - 1200mm only

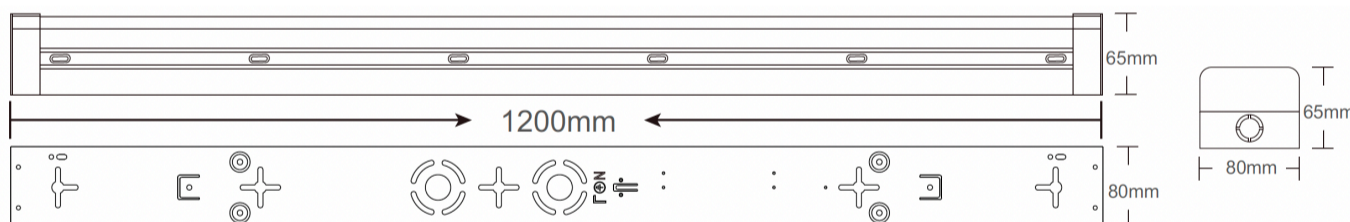

Dimensions & Weight



Model	A	B	C	Net Weight
LPABL6	600mm	65mm	80mm	0.8kg
LPABL	1200mm	65mm	80mm	1.6kg

Technical Specifications

Voltage AC220-240V	Wattage Mixed	Power Factor >0.9	Beam Angle 120°	Colour 3k/4k/55k	Life Cycle 56,000 Hrs
IP Rating IP20	VEET/ESS/REES YES - 1200mm	CRI >80	Diffused Yes	Dimmable Yes	Heat Rating -20°c to +45°c