

MAVERICK Batten Lights




LightPlanet

Bright technology

Cost Effective - Quad Wattage - Tri-Colour - IP65 - High Lumens

Model	Wattage	Type	IP Rating	Lumens	Colour	Warranty
LPMAY	25/30/35/40w	Light Fitting	IP65	2,850 / 3,830 / 4,470 / 5,000	3 / 4 /57k	5 years
LPMAY-MS	25/30/35/40w	Accessory (MS)	IP65	2,850 / 3,830 / 4,470 / 5,000	3 / 4 /57k	5 Years
LPMAY-EMG	25/30/35/40w	Accessory (EMG)	IP65	2,850 / 3,830 / 4,470 / 5,000	3 / 4 /57k	3 Years

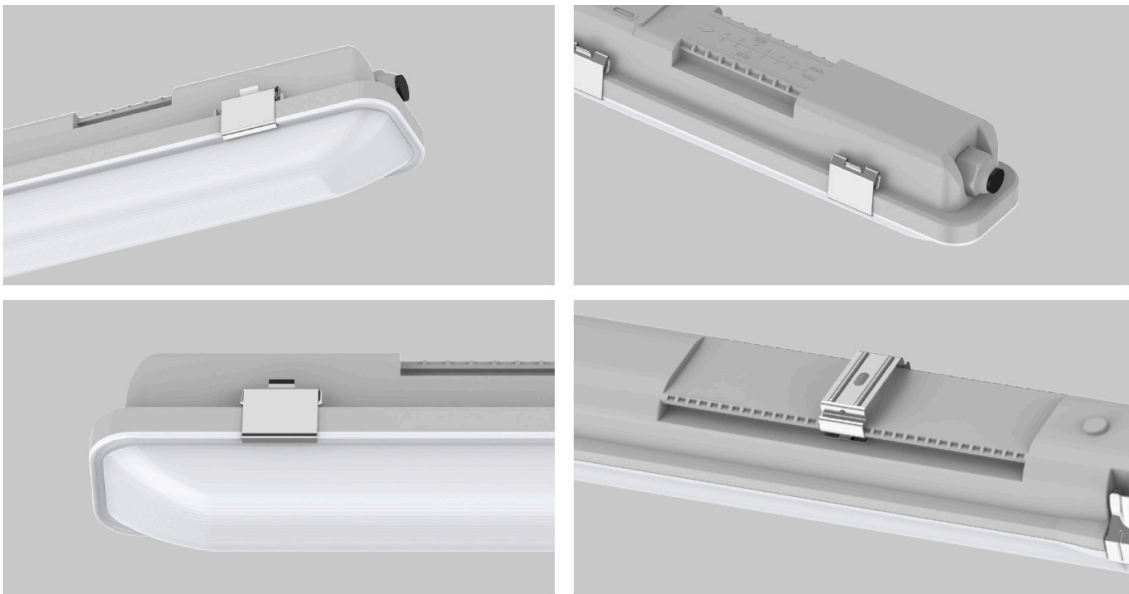

- Features & Benefits
- Quad-wattage with inbuilt dip-switch
 - PC diffuser for anti-glare
 - Rear or side power entry
 - Large power terminal for easy connection
 - High quality driver ensuring excellent working performance


- SS fixing clips
 - IP65 rated
 - IK8 rated
 - SAA Approved
 - Vandal resistant
 - Quick Fit Motion Sensor Accessory Not Included
 - Emergency Option available

Dimensions & Weight

Model	Length	Width	Height	Net Weight
LPMAY	1165mm	75mm	80mm	1.1 kg
LPMAY-MS	Accessory (Motion Sens)	-	-	-
LPMAY-EMG	Accessory (EMG)	-	-	-



Emergency Specifications



Emergency Class	Wattage	Battery Duration	Charge Time	Battery Type	Emergency Power
C0: D63 / C90: D34	Mixed - Above	3 Hours	15 + Hours	LiFePo4 - Long Life	3w - Maintianed


Technical Specifications

Voltage	Wattage	Power Factor	Beam Angle	Colour	Life Cycle
AC220-240V	25/30/35/40w	>0.9	120°	3,000 / 4,000 / 5,700k	56,000 Hrs
IP Rating	EMG Option	CRI	Sensor Option	Dimmable	Heat Rating
IP65	Yes - Accessory	>80	Yes - Accessor	Yes (With sensor)	-20°c to +40°c

Cost Effective - Quad Wattage - Tri-Colour - IP65 - High Lumens

Accessories

Motion Sensor Accessory

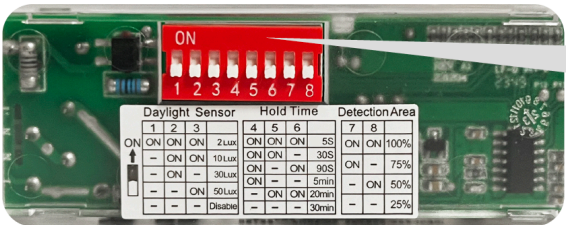


Daylight Sensor			Hold Time			DetectionArea	
1	2	3	4	5	6	7	8
ON	ON	ON	2Lux	ON	ON	5S	ON
ON	ON	ON	10Lux	ON	ON	30S	ON
ON	ON	ON	30Lux	ON	ON	90S	ON
ON	ON	ON	50Lux	ON	ON	20min	ON
ON	ON	ON	Disable	ON	ON	30min	ON


Daylight Sensor			Hold Time			DetectionArea	
1	2	3	4	5	6	7	8
ON	ON	ON	2Lux	ON	ON	5S	ON
ON	ON	ON	10Lux	ON	ON	30S	ON
ON	ON	ON	30Lux	ON	ON	90S	ON
ON	ON	ON	50Lux	ON	ON	20min	ON
ON	ON	ON	Disable	ON	ON	30min	ON

Factory setting:


Factory settings		
Detection Area	Hold Time	Daylight Sensor
100%	5S	Disable



Installation - 1 min to conduct

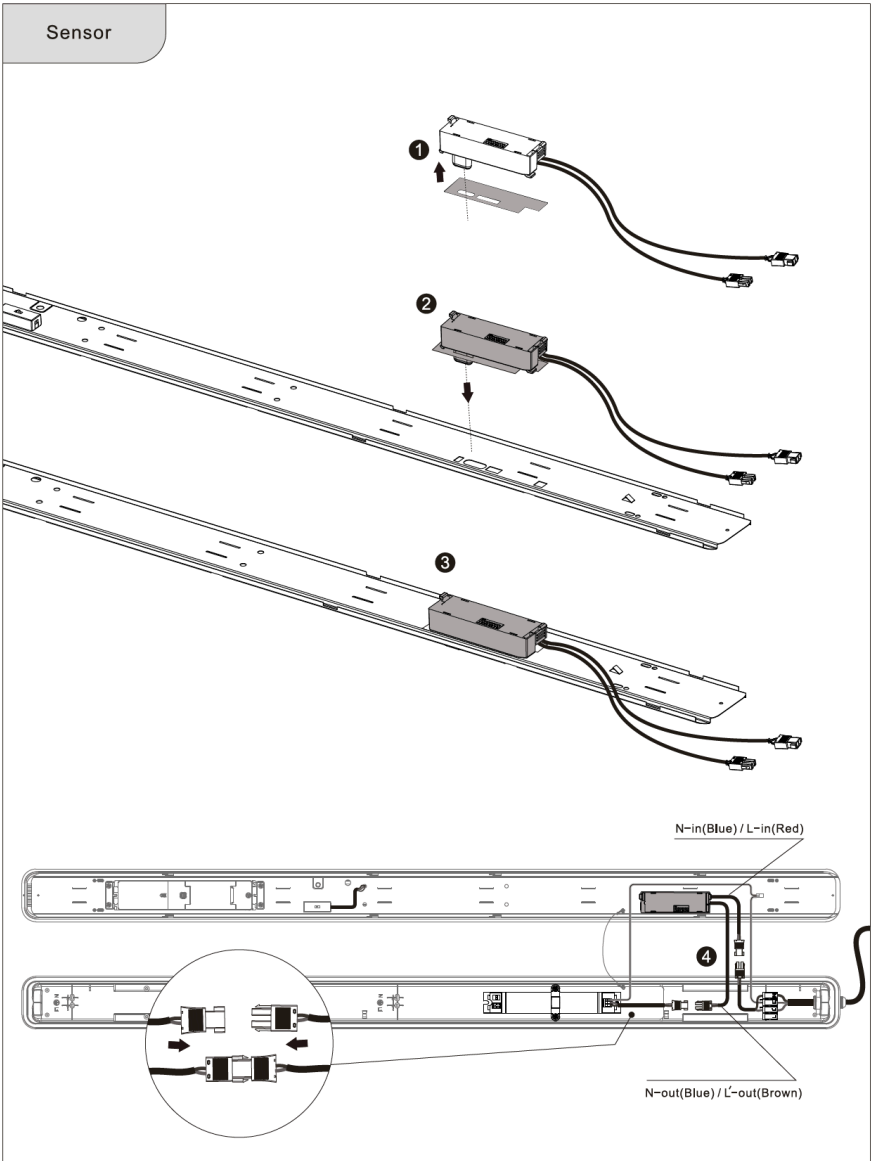

Ceiling Mounting pattern(Unit: m)

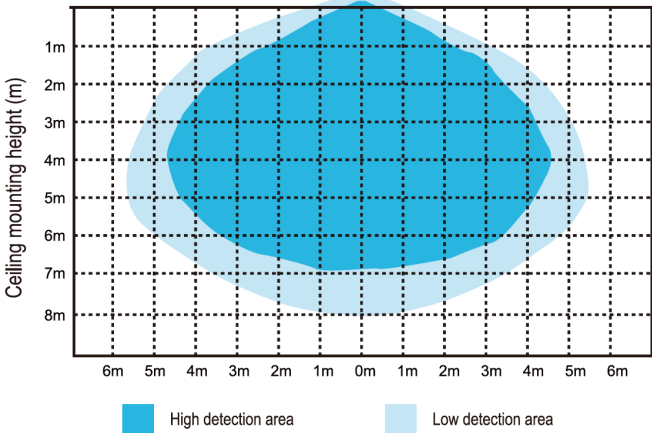

Wall Mounting pattern(Unit: m)

