

Precision LED Flood Lighting

Model	Wattage	VAC	DIM/DALI	Lumens	Beam Angle	Colour	Warranty
PLPSP400-AS54	400	120-240v	Yes - Option	57,000	Asymmetrical	4,000 / 5,000k	5 Years
PLPSP400--(30)(60)	400	120-240v	Yes - Option	57,000	30d and 60d	4,000 / 5,000k	5 Years
PLPSP600-AS54	600	120-240v	Yes - Option	84,000	Asymmetrical	4,000 / 5,000k	5 Years
PLPSP600--(30)(60)	600	120-240v	Yes - Option	84,000	30d and 60d	4,000 / 5,000k	5 Years
PLPSP800-AS54	800	120-240v	Yes - Option	110,000	Asymmetrical	4,000 / 5,000k	5 Years
PLPSP800--(30)(60)	800	120-240v	Yes - Option	110,000	30d and 60d	4,000 / 5,000k	5 Years
PLPSP1000-AS54	1000	120-240v	Yes - Option	139,000	Asymmetrical	4,000 / 5,000k	5 Years
PLPSP1000--(30)(60)	1000	120-240v	Yes - Option	139,000	30d and 60d	4,000 / 5,000k	5 Years
PLPSP1200-AS54	1200	120-240v	Yes - Option	168,000	Asymmetrical	4,000 / 5,000k	5 Years
PLPSP1200--(30)(60)	1200	120-240v	Yes - Option	168,000	30d and 60d	4,000 / 5,000k	5 Years
PLPSP1500-AS54	1500	120-240v	Yes - Option	210,000	Asymmetrical	4,000 / 5,000k	5 Years
PLPSP1500--(30)(60)	1500	120-240v	Yes - Option	210,000	30d and 60d	4,000 / 5,000k	5 Years



Features & Benefits

- Precision LED flood Lighting
- Mounted or remote driver
- 140 L/pw Chip Base
- 120 - 240v as standard
- Excellent heat dispensation
- IP66 rated
- 20kVa surge proptection
- Extruded aluminum body
- Robust, lightweight design
- 5 year warranty
- Excellent asymmetrical beam type
- 0-10 Degree tilt resulting in extremely low sail area
- Available in 6 wattage rages
- Laser aiming tool (Option)
- DALI & Dimmable (Option)
- Easy driver access for servicing and maintenance
- Under hang mounting acceptable.

Technical Specifications

Voltage AC120-240	Wattage MIXED	Power Factor 0.95	Beam Angle Asymmetrical & Directional	Colour 4,000K / 5,000k	Life Cycle 60, 000+
IP Rating IP66	VEET/ESS/REES TBA	CRI >72	Powder Coating Anti Corrosive PC	Dimmable/DALI Option	Heat Rating -30°c to +50°c

* Please Note: Light Planet’s warranty covers for defective products only. No incidentals like labor or hire cost shall be claimed from any party. Please read our T&C for further information.

SPORTS-PRO Stadium Floods



LightPlanet

Bright technology

Precision LED Flood Lighting

Dimensions / Weight & Mounting Options

Model / Wattage	Length	Height	Depth	Driver Weight	Lamp Weight
PLPSP400w	451mm	297mm	119mm	3.6 kg's	6.3 kg's
PLPSP600w	451mm	329mm	119mm	3.6 kg's	7.8 kg's
PLPSP800w	510mm	493mm	165mm	3.6 kg's	13.7 kg's
PLPSP1000w	510mm	615mm	190mm	4.9 kg's	16.4 kg's
PLPSP1200w	510mm	648mm	190mm	4.9 kg's	18.8 kg's
PLPSP1500w	514mm	860mm	220mm	6.3 kg's	24.8 kg's


Model	Sail Area	Under Hang	Removable Driver
PLPSP400-800	0.0240	YES	YES (order parts)
PLPSP1000-1500	0.0360	YES	YES (order parts)



0 Tilt resulting in a very low Sail Area




6 Different Wattage Groups

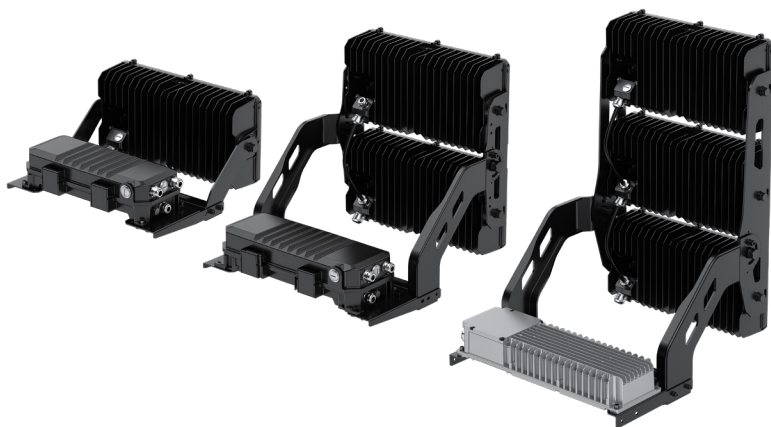

20kVa Surge Protection



Cable protection Recommended

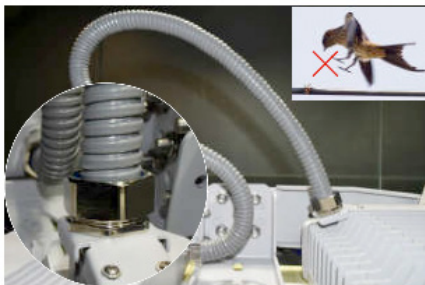

* Please Note: Light Planet’s warranty covers for defective products only. No incidentals like labor or hire cost shall be claimed from any party. Please read our T&C for further information.