

ROVER Area Flood Light


Switchable Area Flood Lighting

Model	Wattage	IP Rating	Surge Protect	Lumens	Colour	Warranty
LPRSF	450 / 520 / 600w	IP66	Yes	67,500 / 78,000 / 89,000	4,000k	5 Years



Features & Benefits

- 145 - 155 lumens per watt
- Excellent heat dispensation
- IP66 Rated
- Extruded Aluminum body
- 56,000 average life hours
- Robust and sturdy design
- 5 year warranty
- Forward through, Asymmetrical beam angle ensure low spill and obtrusive light
- Excelent tennis court & area flood lighting
- 20Kv Surge Protection Included as standard

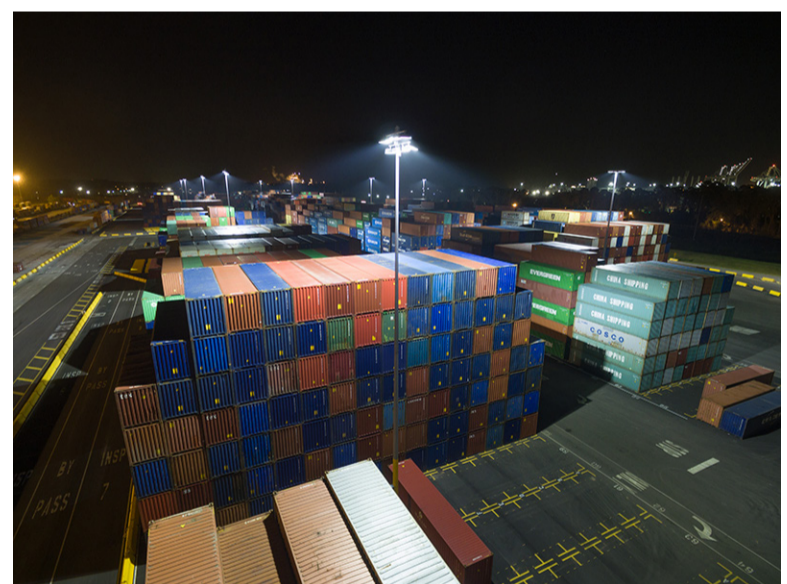

Technical Specifications

Voltage AC120 - 240V	Wattage 450 / 520 / 600w	Power Factor 0.95	Beam Angle Specialized ASYM	Colour 4,000K	Life Cycle 56, 000+
IP Rating IP66	IK Rating IK10	CRI >72	Diffused No	Dimmable No	Heat Rating -30°c to +50°c


* Please Note: Light Planet's warranty covers for defective products only. No incidentals like labor or hire cost shall be claimed from any party. Please read our T&C for further information.

ROVER Area Flood Light





Dimensions & Weight

Model	Length (Front to back)	Width	Depth	Weight
LPRSF	635mm	656mm	82mm	15.70 kg's

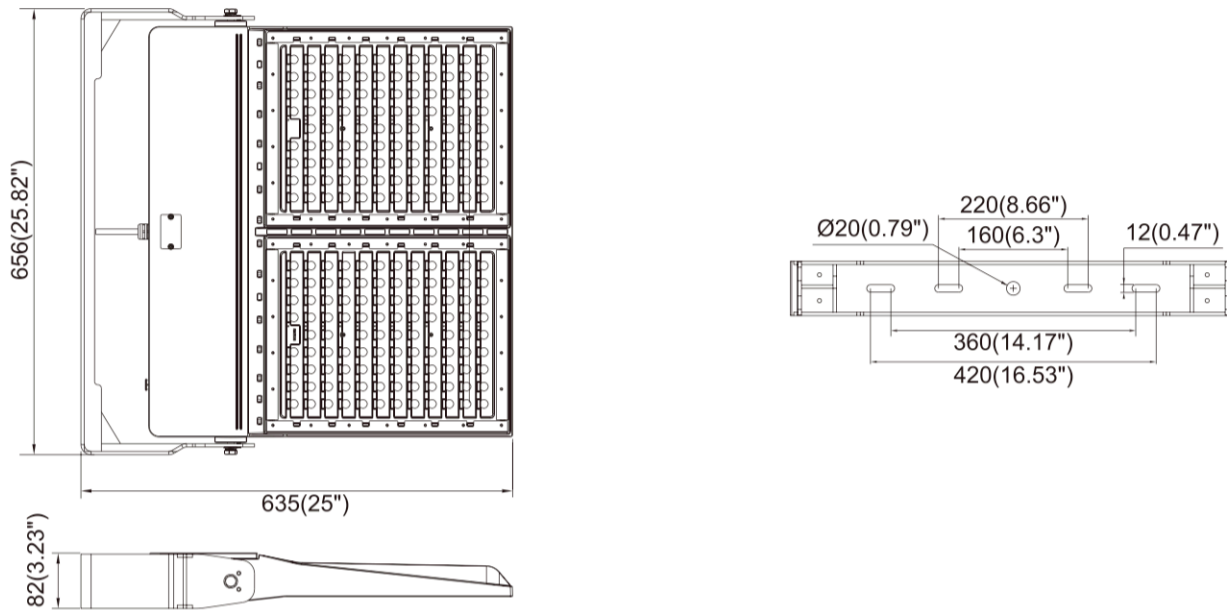

Model No.	LPRSF450-600
Input Voltage	120-240VAC
Power Frequency	50/60 Hz
Outlook Dimensions	656x635x82mm(25.82"x25"x3.23")
Luminaire Net Weight	15.7±0.3kg(34.61±0.66Lbs)
EPA	0.33m ² (4.2ft ²)
Storing Temperature	-30°C to +50°C(-22°F to +122°F)
Working Temperature	-40°C to +70°C(-40°F to +158°F)

Wattage Switchable

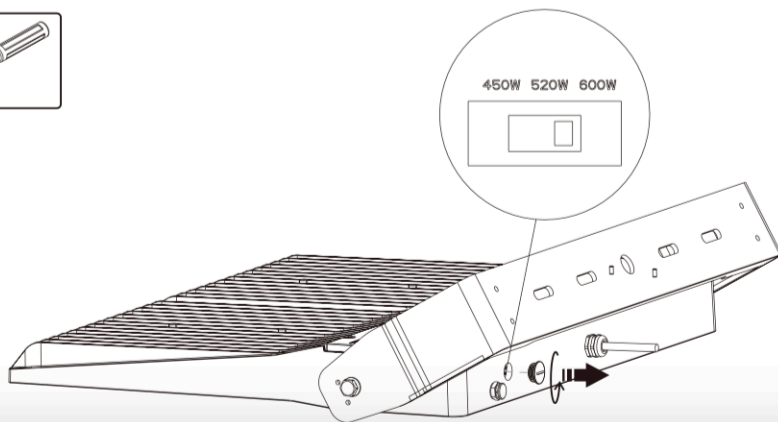

Wattage Switchable



* Please Note: Light Planet's warranty covers for defective products only. No incidentals like labor or hire cost shall be claimed from any party. Please read our T&C for further information.